

PHILIPS

HearLink

Technical data

HearLink 9050

miniRITE

Philips HearLink 50 miniRITE (MNR) is a rechargeable hearing instrument suitable for slight to profound hearing loss. It includes our most advanced audiological features in SoundMap 3. Thanks to LE Audio and Bluetooth® Low Energy it supports hands-free communication and direct

streaming for iPhone, iPad, Mac and select Android™ devices. It comes with the new miniFit Detect speaker system, four power levels and a wide variety of domes and custom moulds.



Technical features

- Hands-free communication¹
- Direct streaming²
- LE Audio
- Bluetooth Low Energy technology
- Faster charging
- LED visual indicator
- miniFit Detect speakers
- Telecoil
- Hydrophobic coating

Accessories

- Philips HearLink 2 app
- Philips AudioClip
- Philips TV Adapter
- Philips Remote Control
- Philips Charger miniRITE (MNR)
- Charger Plus miniRITE (MNR)

For information on compatibility, please visit hearingsolutions.philips.com/en-ca/support/connectivity/compatibility

Operating and charging conditions
Temperature: +5°C to +40°C (41°F to 104°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Transportation and storage conditions
Temperature and humidity shall not exceed the mentioned limits for extended periods during transportation and storage:

Transport
Temperature: -20°C to +60°C (-4°F to 140°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Storage
Temperature: -20°C to +30°C (-4°F to 86°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa


1) Hands-free communication is available on select devices
2) From iPhone, iPad, Mac and select Android devices

WARNING: No modification of this equipment is allowed.
Apple, the Apple logo, iPhone, iPad, Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. Use of the Made for Apple badge means that an accessory has been designed to connect specifically to the Apple product(s) identified in the badge, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.




Fitting ranges


Philips HearLink 9050

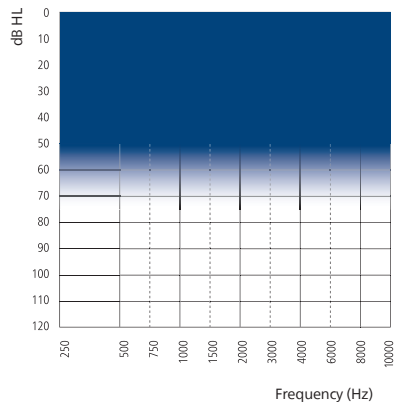


60

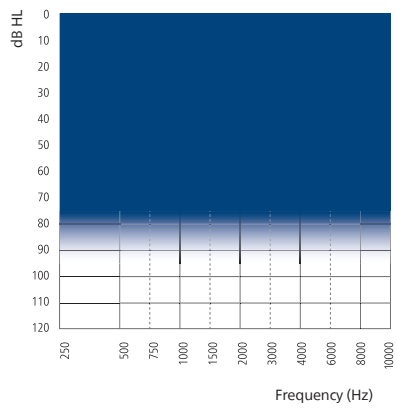

85

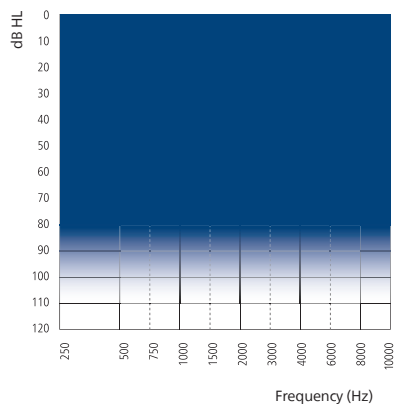

100

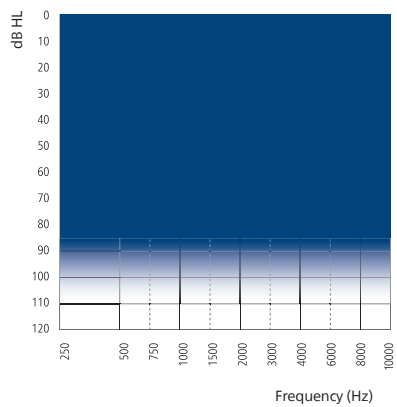

105

Feature overview

	HearLink 9050
SoundMap 3	
SoundGuide	•
Amplification	
Frequency bandwidth	10 kHz
Extended Dynamic Range	•
Low Frequency Enhancement	•
Frequency Lowering	•
Comfort Control	4 Options
Noise Reduction	
AI Noise Reduction	5 Options
Speech Clarifier	3 Options
Transition	4 Options
SoundProtect Transient Noise Reduction	6 Options
SoundProtect Wind Noise Management	•
Soft Noise Management	•
Binaural Noise Management	•
Directionality	
Dynamic Directionality	•
Pinna Mode	2 Options
Adaptive/Fixed/Omni Directionality	•
Feedback Canceller	
Strength control	•
SoundTie 3 with LE Audio, MFi and ASHA	
Direct streaming ¹	•
Hands-free communication ²	•
Binaural coordination (NFMI)	
Binaural Volume & Program Change	•
Programming options	
Fitting Bands	24
Environments	13
Manual listening programs	4
HiFi Music	•
Airplane Program	•
Data Logging and Connection Count	•
Audible Indicators & Notify Me	•
Tap control	•
Adaptation Manager	•
CROS compatibility	•
Tinnitus SoundSupport	•

1) From iPhone, iPad, Mac and select Android devices

2) Hands-free communication is available on select devices

HearLink 9050 miniRITE

Ear Simulator




Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.




Speaker 60 / 100
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Speaker 85 / 105
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

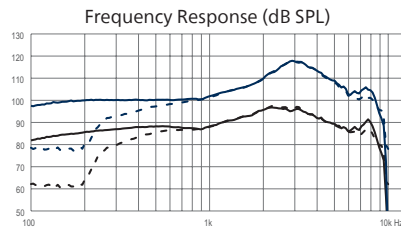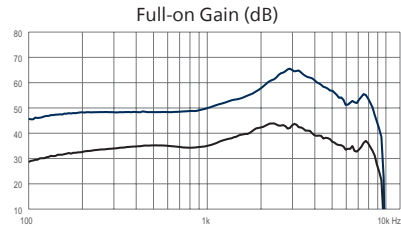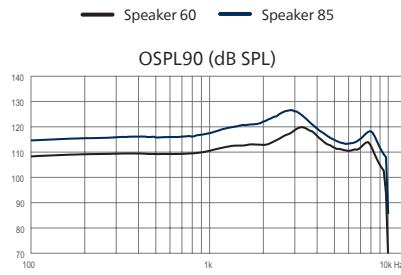

Speaker 60

Speaker 85

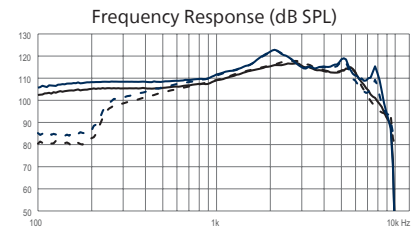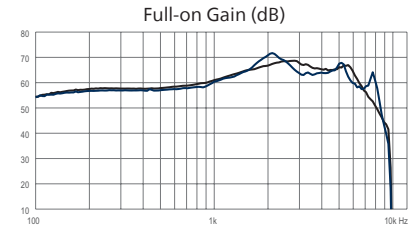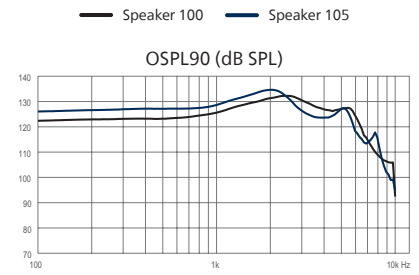

Speaker 100

Speaker 105

OSPL90, Peak (dB SPL)	120	127	132	135
OSPL90, 1600 Hz (dB SPL)	113	121	130	133
OSPL90, HFA (dB SPL)	113	121	129	131
Full-on Gain, Peak (dB)	44	66	69	72
Full-on Gain, 1600 Hz (dB) ¹	40	54	65	65
Full-on Gain, HFA (dB)	39	56	65	65
Reference test gain (dB)	33	46	54	57
Frequency range (Hz)	<100-9400	<100-9400	<100-8800	<100-8800
Telecoil output, 1 mA/m field (1600 Hz) (dB SPL)	71	85	97	97
Telecoil output, 10 mA/m field (1600 Hz) (dB SPL)	91	105	117	117
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2	<3	<3
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<3	<2	<3
Equivalent input noise level, Omni (dB SPL)	17	22	16	17
Equivalent input noise level, Dir (dB SPL)	27	30	26	27
Battery	Lithium-ion	Lithium-ion	Lithium-ion	Lithium-ion
Expected operating time, hours ²	24	24	24	24

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Expected operating time for rechargeable battery depends on use pattern, active feature set, hearing loss, sound environment, battery age and use of wireless accessories.

HearLink 9050 miniRITE

2CC Coupler




Measured according to ANSI S3.22-2014, IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used unless otherwise stated.




Speaker 60 / 100
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Speaker 85 / 105
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

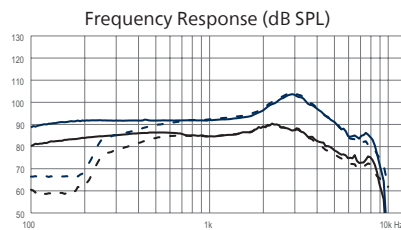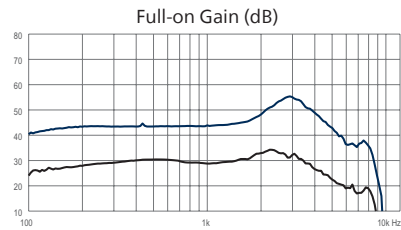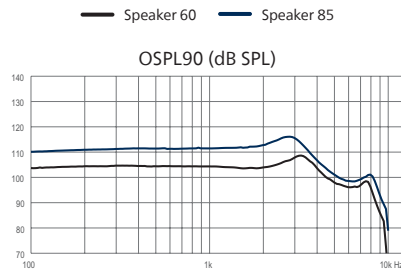

Speaker 60

Speaker 85

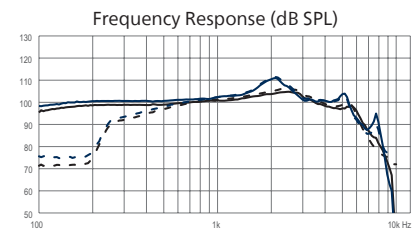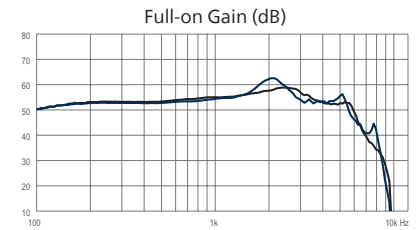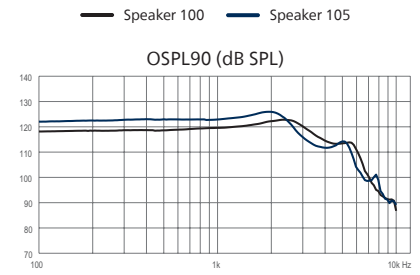

Speaker 100

Speaker 105

OSPL90, Peak (dB SPL)	109	116	123	126
OSPL90, 1600 Hz (dB SPL)	104	112	121	125
OSPL90, HFA (dB SPL)	105	113	121	123
Full-on Gain, Peak (dB)	34	55	59	63
Full-on Gain, 1600 Hz (dB) ¹	31	45	57	57
Full-on Gain, HFA (dB)	31	47	57	57
Reference test gain (dB)	27	36	43	45
Frequency range (Hz)	<100-8400	<100-8500	<100-7100	<100-8200
Telecoil output, 1 mA/m field (1000 Hz) (dB SPL)	60	75	86	86
Telecoil output, HFA-SPLITS L/R (dB SPL)	87	96	103	105
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2	<2	<2
Equivalent input noise level, Omni (dB SPL)	18	19	16	17
Equivalent input noise level, Dir (dB SPL)	30	30	29	29
Battery	Lithium-ion	Lithium-ion	Lithium-ion	Lithium-ion
Expected operating time, hours ²	24	24	24	24

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Expected operating time for rechargeable battery depends on use pattern, active feature set, hearing loss, sound environment, battery age and use of wireless accessories.

 **SBO Hearing A/S**
Kongebakken 9
DK-2765 Smørum
Denmark

hearingsolutions.philips.com

Imported and distributed by:
Audmet Canada Ltd
1600-4950 Yonge St
Toronto, ON M2N 6K1



hearingsolutions.philips.ca

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license. This product has been manufactured by or for and is sold under the responsibility of SBO Hearing A/S, and SBO Hearing A/S is the warrantor in relation to this product.