

Technical data



Oticon Intent 1 | 2 | 3 | 4 miniRITE

Oticon Intent™ miniRITE comes in a discreet design and features a rechargeable lithium-ion battery, telecoil and a single push-button. The hearing aid is built on the Sirius™ platform and powered by Oticon BrainHearing™

technology. With LE Audio and Bluetooth® Low Energy it supports hands-free communication and direct streaming for iPhone, iPad, Mac and select Android™ devices. It comes with the miniFit Detect speaker system.

Speaker 60



miniRITE

Speaker 85



miniRITE

Speaker 100



miniRITE

Speaker 105



miniRITE

Technical features

- › Hands-free communication¹
- › Direct streaming²
- › Bluetooth Low Energy technology
- › LE Audio
- › NFMI (Near-Field Magnetic Induction)
- › Telecoil
- › Hydrophobic coating
- › Contact charging
- › miniFit Detect speakers

Accessories

- › Oticon Companion app
- › ConnectClip
- › EduMic
- › TV Adapter 3.0
- › Phone Adapter 2.0
- › Oticon Charger miniRITE

For information on compatibility, please visit www.oticon.global/compatibility

Operating and charging conditions
Temperature: +5°C to +40°C (41°F to 104°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

Transportation and storage conditions
Temperature and humidity shall not exceed the mentioned limits for extended periods during transportation and storage:

Transport
Temperature: -20°C to +60°C (-4°F to 140°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa


Storage
Temperature: -20°C to +30°C (-4°F to 86°F)
Humidity: 5% to 93% relative humidity, non-condensing
Atmospheric pressure: 700 hPa to 1060 hPa

1) Hands-free communication is available on select devices
2) From iPhone, iPad, Mac and select Android devices


WARNING: No modification of this equipment is allowed.
Apple, the Apple logo, iPhone, iPad, Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. Use of the Made for Apple badge means that an accessory has been designed to connect specifically to the Apple product(s) identified in the badge, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.

Fitting ranges

Oticon Intent 1


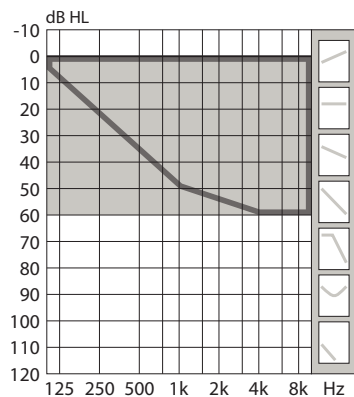


Oticon Intent 2 | 3 | 4

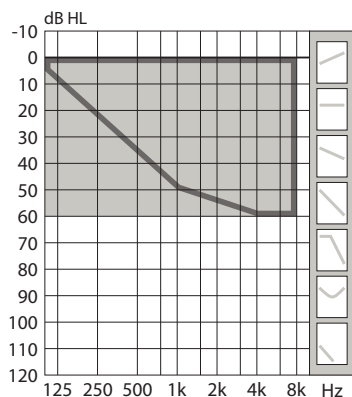



60

- Mould, Bass & Power dome
- OpenBass dome

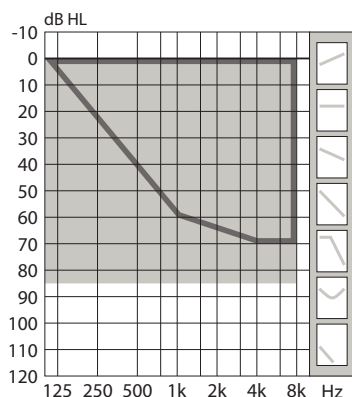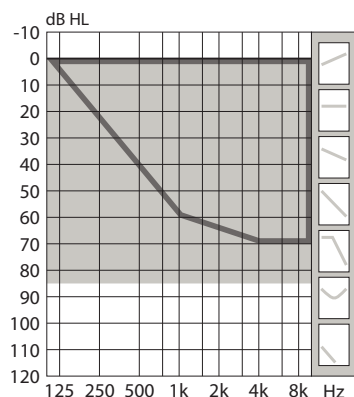



85

- Mould, Bass & Power dome
- OpenBass dome

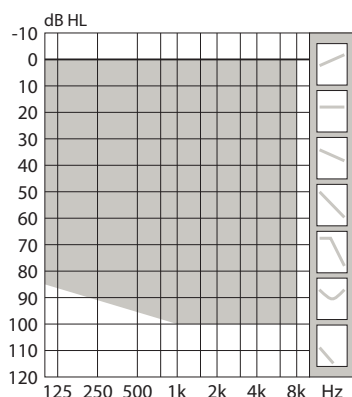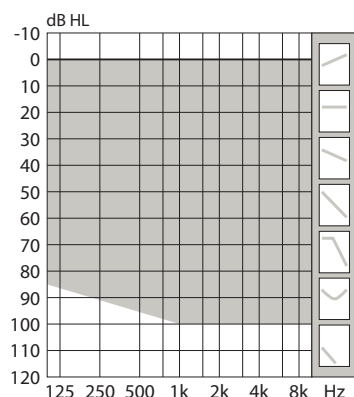

100

- MicroShell Detect 100, Bass & Power dome

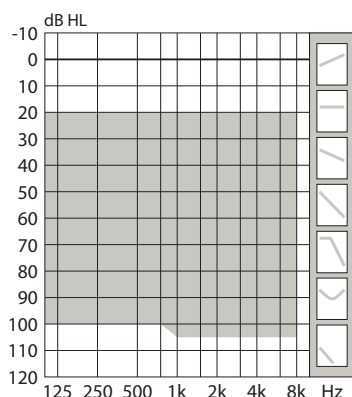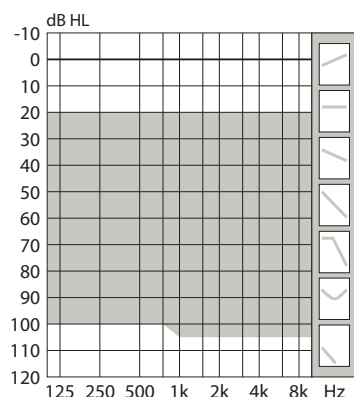

105

- MicroShell Detect 105

Feature overview

	Intent 1	Intent 2	Intent 3	Intent 4
Speech understanding & listening ease				
MoreSound Intelligence™ 3.0	Level 1	Level 2	Level 3	Level 4
Sensor technology	•	•	-	-
Environment classifier	5 configurations	5 configurations	3 configurations	Not adjustable
Virtual Outer Ear	3 configurations	2 configurations	1 configuration	1 configuration
Spatial Balancer	100%	60%	60%	40%
Neural Noise Suppression, Difficult / Easy	12 dB / 6 dB	10 dB / 4 dB	8 dB / 2 dB	6 dB / 0 dB
Sound Enhancer	3 configurations	2 configurations	1 configuration	1 configuration
Wind & Handling Stabilizer	•	•	•	•
MoreSound Amplifier™ 3.0	•	•	•	•
SuddenSound Stabilizer	6 configurations	5 configurations	4 configurations	2 configurations
MoreSound Optimizer™	•	•	•	•
Feedback shield	•	•	•	•
Spatial Sound™	4 estimators	4 estimators	4 estimators	-
Soft Speech Booster	•	•	•	•
Frequency lowering, Speech Rescue™	•	•	•	•
Sound quality				
Clear Dynamics	•	•	-	-
Better-Ear Priority	•	•	•	-
Fitting Bandwidth ¹	10 kHz	8 kHz	8 kHz	8 kHz
Power Bass (streaming)	•	•	•	•
Processing Channels	64	48	48	48
Personalisation & optimised fitting				
Fitting Bands	24	20	18	14
Multiple Directionality options	•	•	•	•
Adaptation Management	•	•	•	•
Fitting Formulas	VAC+, NAL-NL1/ NAL-NL2, DSL v5	VAC+, NAL-NL1/ NAL-NL2, DSL v5	VAC+, NAL-NL1/ NAL-NL2, DSL v5	VAC+, NAL-NL1/ NAL-NL2, DSL v5
Connecting to the world				
Oticon Companion app	•	•	•	•
LE Audio	•	•	•	•
Hands-free communication ²	•	•	•	•
Direct streaming ³	•	•	•	•
ConnectClip	•	•	•	•
EduMic	•	•	•	•
Remote Control 3.0	•	•	•	•
TV Adapter 3.0	•	•	•	•
Phone Adapter 2.0	•	•	•	•
Tinnitus SoundSupport™	•	•	•	•
CROS/BiCROS support	•	•	•	•

1) Bandwidth accessible for gain adjustments during fitting

2) Hands-free communication is available on select devices

3) From iPhone, iPad, Mac and select Android devices



Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.

Speaker 60 / 100
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Speaker 85 / 105
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

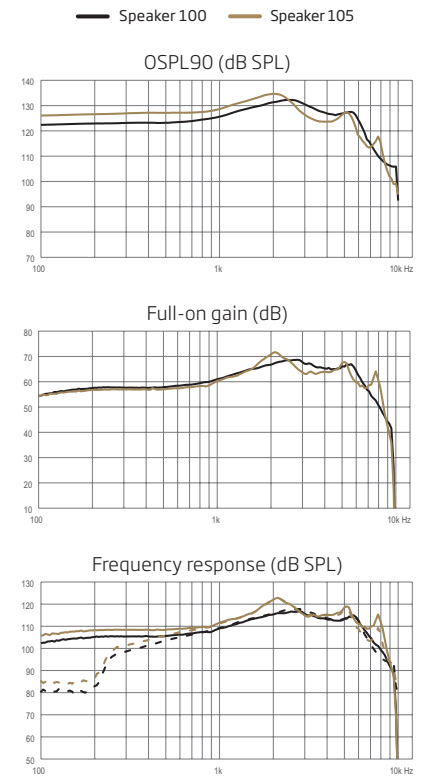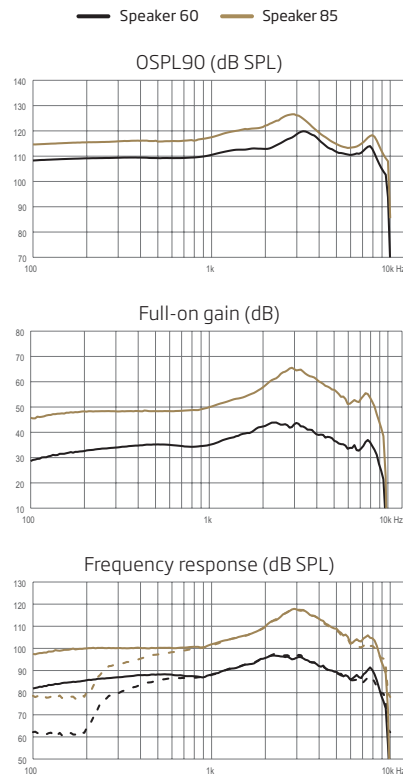

	Speaker 60	Speaker 85	Speaker 100	Speaker 105
OSPL90, Peak (dB SPL)	120	127	132	135
OSPL90, 1600 Hz (dB SPL)	113	121	130	133
OSPL90, HFA (dB SPL)	113	121	129	131
Full-on gain, Peak (dB)	44	66	69	72
Full-on gain, 1600 Hz (dB) ¹	40	54	65	65
Full-on gain, HFA (dB)	39	56	65	65
Reference test gain (dB)	33	46	54	57
Frequency range (Hz)	<100-9400	<100-9400	<100-8800	<100-8800
Telecoil output, 1 mA/m field (1600 Hz) (dB SPL)	71	85	97	97
Telecoil output, 10 mA/m field (1600 Hz) (dB SPL)	91	105	117	117
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2	<3	<3
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<3	<2	<3
Equivalent input noise level, Omni (dB SPL)	17	22	16	17
Equivalent input noise level, Dir (dB SPL)	27	30	26	27
Battery	Lithium-ion	Lithium-ion	Lithium-ion	Lithium-ion
Expected operating time, hours ²	24	24	24	24

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Expected operating time for rechargeable battery depends on use pattern, active feature set, hearing loss, sound environment, battery age and use of wireless accessories.

Oticon Intent 1 miniRITE

2CC Coupler


Measured according to ANSI S3.22-2014,
IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used
unless otherwise stated.


Speaker 60 / 100
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Speaker 85 / 105
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

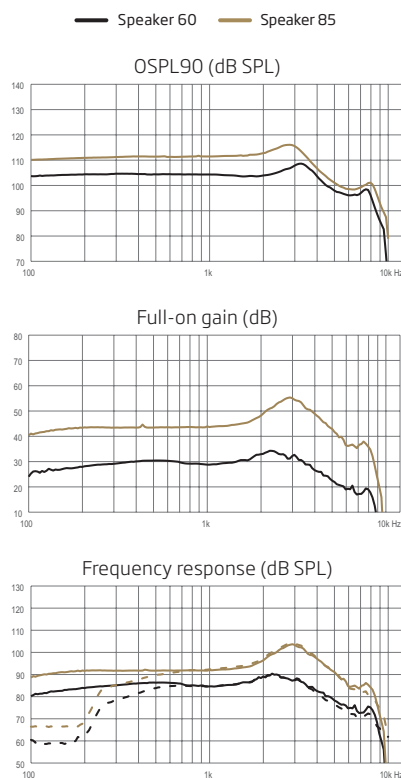

Speaker 60

Speaker 85

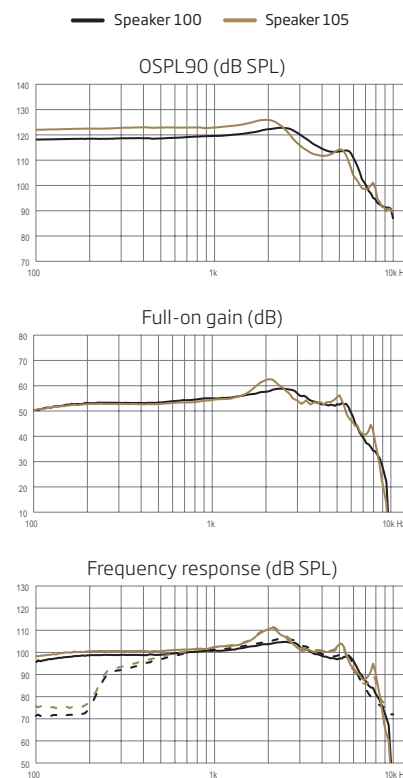

Speaker 100

Speaker 105

OSPL90, Peak (dB SPL)	109	116	123	126
OSPL90, 1600 Hz (dB SPL)	104	112	121	125
OSPL90, HFA (dB SPL)	105	113	121	123
Full-on gain, Peak (dB)	34	55	59	63
Full-on gain, 1600 Hz (dB) ¹	31	45	57	57
Full-on gain, HFA (dB)	31	47	57	57
Reference test gain (dB)	27	36	43	45
Frequency range (Hz)	<100-8400	<100-8500	<100-7100	<100-8200
Telecoil output, 1 mA/m field (1000 Hz) (dB SPL)	60	75	86	86
Telecoil output, HFA SPLITS L/R (dB SPL)	87	96	103	105
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2	<2	<2
Equivalent input noise level, Omni (dB SPL)	18	19	16	17
Equivalent input noise level, Dir (dB SPL)	30	30	29	29
Battery	Lithium-ion	Lithium-ion	Lithium-ion	Lithium-ion
Expected operating time, hours ²	24	24	24	24

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Expected operating time for rechargeable battery depends on use pattern, active feature set, hearing loss, sound environment, battery age and use of wireless accessories.

Oticon Intent 2 | 3 | 4 miniRITE

Ear Simulator


Measured according to IEC 60118-0:1983/AMD1:1994, IEC 60118-0:2015, IEC 60118-1:1995+AMD1:1998 CSV and IEC 60318-4:2010



Technical information
Omnidirectional mode is used unless otherwise stated.


Speaker 60 / 100
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Speaker 85 / 105
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

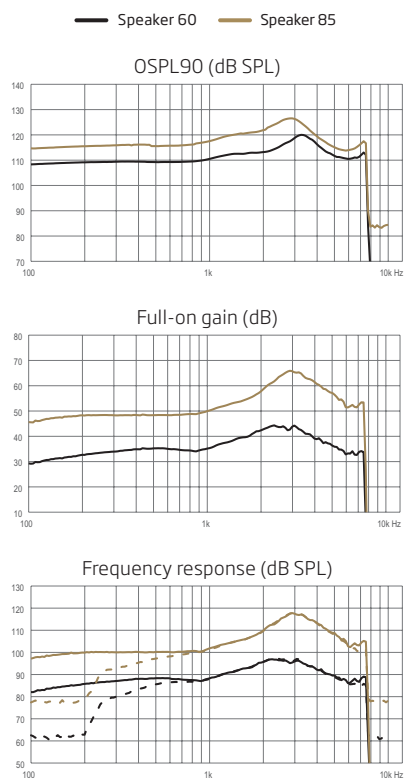

Speaker 60

Speaker 85

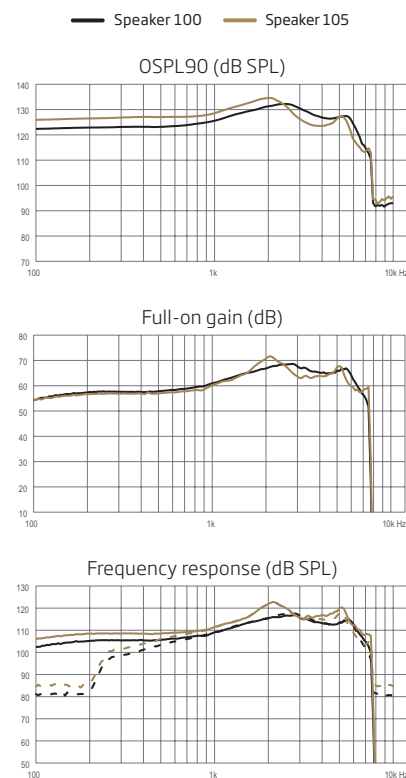

Speaker 100

Speaker 105

OSPL90, Peak (dB SPL)	120	127	132	135
OSPL90, 1600 Hz (dB SPL)	113	121	130	133
OSPL90, HFA (dB SPL)	113	121	129	131
Full-on gain, Peak (dB)	44	66	69	72
Full-on gain, 1600 Hz (dB) ¹	40	54	65	65
Full-on gain, HFA (dB)	39	56	65	65
Reference test gain (dB)	33	46	54	57
Frequency range (Hz)	<100-7500	<100-7500	<100-7500	<100-7500
Telecoil output, 1 mA/m field (1600 Hz) (dB SPL)	71	85	97	97
Telecoil output, 10 mA/m field (1600 Hz) (dB SPL)	91	105	117	117
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2	<3	<3
Total harmonic distortion (Input 70 dB SPL), 1600 Hz (%)	<3	<3	<2	<3
Equivalent input noise level, Omni (dB SPL)	17	22	16	17
Equivalent input noise level, Dir (dB SPL)	27	30	26	27
Battery	Lithium-ion	Lithium-ion	Lithium-ion	Lithium-ion
Expected operating time, hours ²	24	24	24	24

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Expected operating time for rechargeable battery depends on use pattern, active feature set, hearing loss, sound environment, battery age and use of wireless accessories.


Measured according to ANSI S3.22-2014,
IEC 60118-0:2015 and IEC 60318-5:2006



Technical information
Omnidirectional mode is used
unless otherwise stated.


Speaker 60 / 100
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

Speaker 85 / 105
— Acoustic input: 60 dB SPL
- - - Magnetic input: 31.6 mA/m

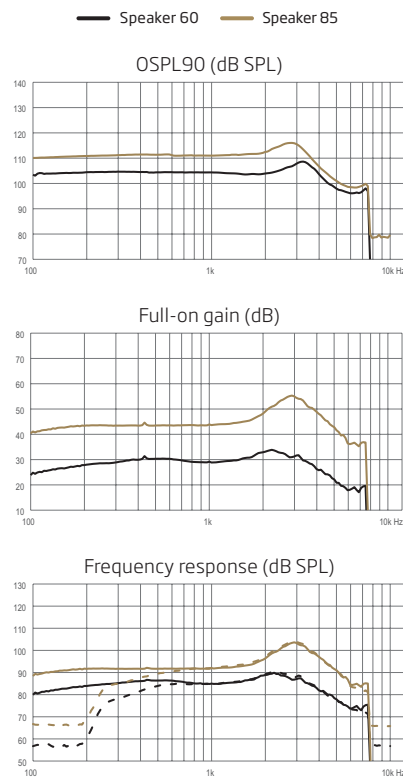

Speaker 60

Speaker 85

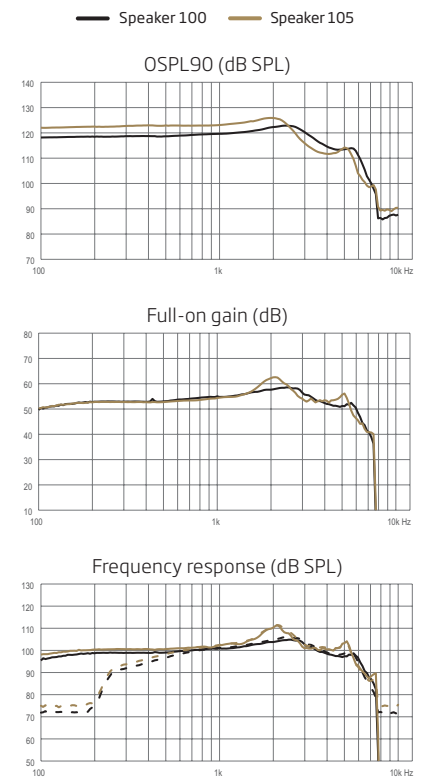

Speaker 100

Speaker 105

OSPL90, Peak (dB SPL)	109	116	123	126
OSPL90, 1600 Hz (dB SPL)	104	112	121	125
OSPL90, HFA (dB SPL)	105	113	121	123
Full-on gain, Peak (dB)	34	55	59	63
Full-on gain, 1600 Hz (dB) ¹	31	45	57	57
Full-on gain, HFA (dB)	31	47	57	57
Reference test gain (dB)	27	36	43	45
Frequency range (Hz)	<100-7500	<100-7500	<100-7100	<100-7500
Telecoil output, 1 mA/m field (1000 Hz) (dB SPL)	60	75	86	86
Telecoil output, HFA SPLITS L/R (dB SPL)	87	96	103	105
Total harmonic distortion (Input 70 dB SPL), 500 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 70 dB SPL), 800 Hz (%)	<2	<2	<2	<2
Total harmonic distortion (Input 65 dB SPL), 1600 Hz (%)	<2	<2	<2	<2
Equivalent input noise level, Omni (dB SPL)	18	19	16	17
Equivalent input noise level, Dir (dB SPL)	30	30	29	29
Battery	Lithium-ion	Lithium-ion	Lithium-ion	Lithium-ion
Expected operating time, hours ²	24	24	24	24

1) Measured with the gain control of the hearing aids set to their full-on position minus 20 dB and with an input SPL of 70 dB. This is to obtain a gain response equal to the full-on gain response from e.g. IEC 60118-0:1983+A1:1994 but without influence of feedback.

2) Expected operating time for rechargeable battery depends on use pattern, active feature set, hearing loss, sound environment, battery age and use of wireless accessories.



SBO Hearing A/S
Kongebakken 9
DK-2765 Smørum
Denmark

Headquarters
Oticon A/S
Kongebakken 9
DK-2765 Smørum
Denmark

271351UK/2024.02.21/v5